

## Soundwall T&G Reflective Noise Barrier

### Technical Data

- Reflective Category B3
- Category ratings according to BS EN 1793-2:1998
- Laboratory tested sound reduction up to 28dB
- NHSS certified
- Approximate weight = 27kg/m<sup>2</sup>



| Layer / Component           | Density kg/m3 | Standard Superficial Mass kg/m2 | Function                         |
|-----------------------------|---------------|---------------------------------|----------------------------------|
| Face Boards (full coverage) | 530           | 16.96                           | Primary sound reflecting surface |

### Comparing products the right way

When comparing this data please bear in mind that not all suppliers use the same approach and may quote misleading figures. It is essential to ensure you are comparing like with like. **Superficial mass should not be compared with average density or weight.**

### The Ransfords range of noise barriers are:

- Independently tested to recognised standard
- Value engineered using advanced sawmill technology
- Available with CE marking for prefabricated panels when specified
- Proven in use near roads, railways, manufacturing and distribution facilities
- Extremely durable
- Available in both reflective and absorbent specifications
- Aesthetically pleasing
- Fully compliant with Highways Agency Standard treatment
- Made in the UK from sustainable British timber

### Contact


**Luke Offa**  
T: 07876 826022  
E: luke@ransfords.co.uk  
(Home counties)

**Chris Offa**  
T: 07741 272267  
E: chris@ransfords.co.uk  
(Wales, the Midlands  
& South West England)

Station Street, Bishops  
Castle, Shropshire SY9 5AQ  
T: 01588 638 331  
E: info@ransfords.co.uk  
**www.ransfords.co.uk**

## Soundwall T&G Reflective Noise Barrier

### Standard detail

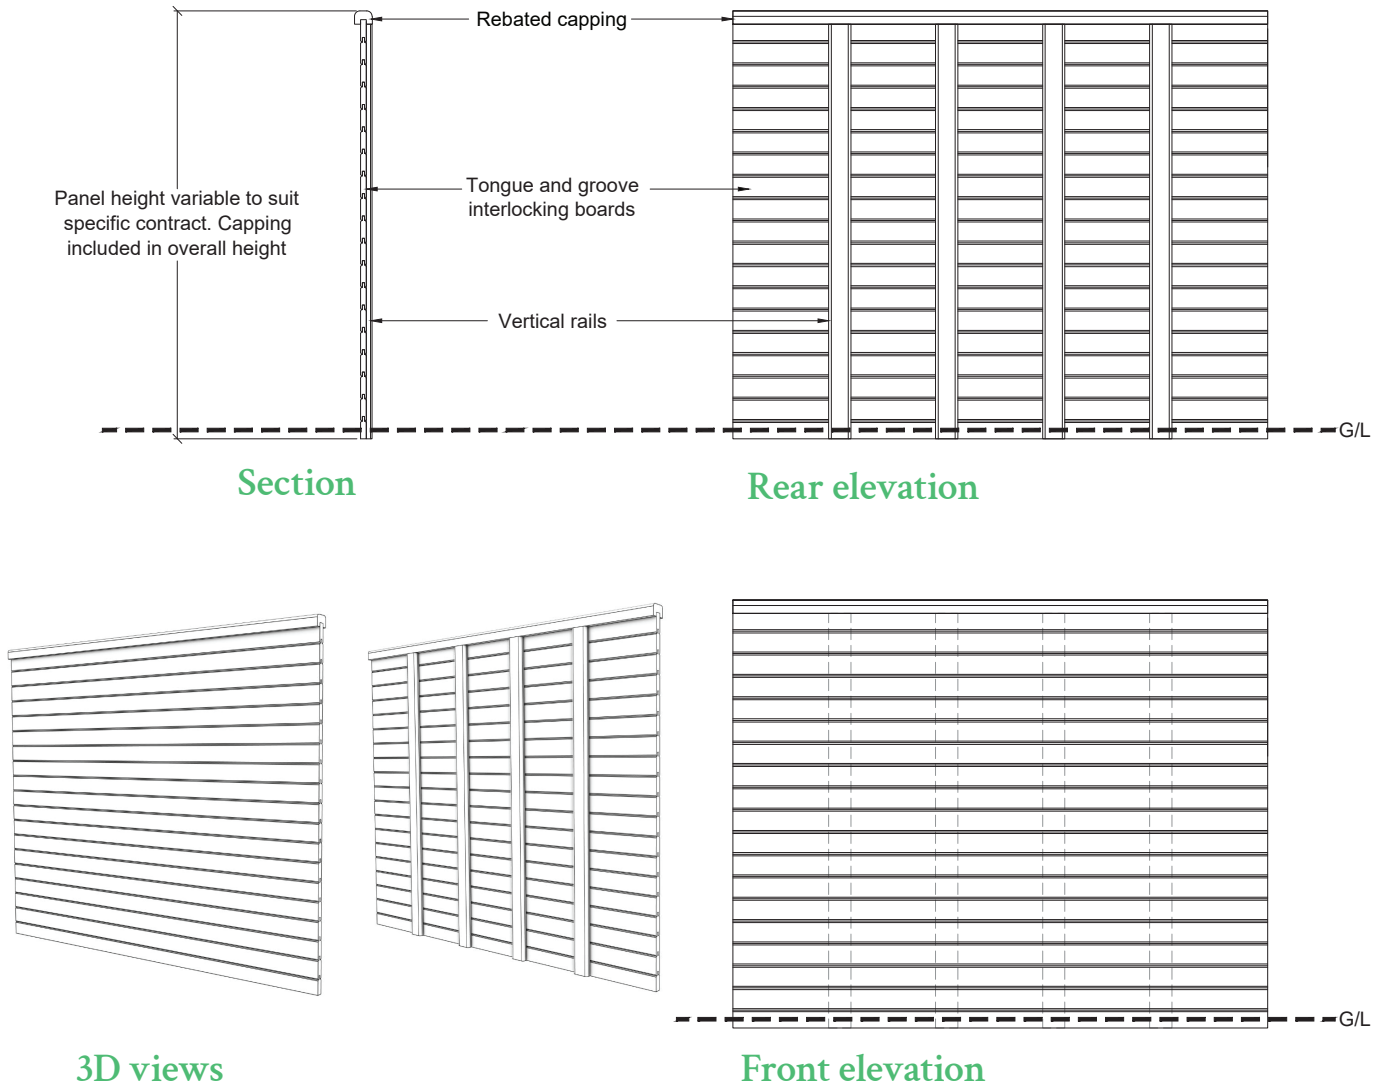

This drawing is the property of Charles Ransford & Son Ltd and may not be copied or reproduced in any way without prior written permission.

### Important notes

- The design of the noise barrier is dependant on individual specifications and this drawing is shown for illustrative purposes only.
- The exact design criteria should be specified by a professional designer and qualified for intended purpose by a structural engineer. Any structural requirements must be specified prior to manufacture. Strength graded timber is available on request.
- The noise barriers can be installed on timber or steel posts. Post sizes must be specified by a structural engineer to suit the specific contract. The method used for fixing the noise barriers to the posts is the responsibility of the customer.
- Charles Ransford and Son Ltd do not take responsibility for any persons adopting this design as a structure without seeking professional advice first. Charles Ransford and Son Ltd are manufacturers and operate on the principle of supplying what is ordered. It remains the customer's responsibility to ensure ordered materials are adequate and fit for purpose for the intended application.

# Soundwall T&G Reflective Noise Barrier

## UKAS Certificate

Issued by University of Salford (Acoustics Test Laboratory)  
UKAS ACCREDITED TEST LABORATORY NO. 1262

**BS EN 1793-2 : 1998**

**Acoustics- Road traffic noise reducing devices**

**Test method for determining the acoustic performance**

**Client:** Charles Ransford & Son Ltd  
Station St  
Bishop's Castle  
Shropshire SY9 5AQ

**Object:** Soundwall® - Interlocking Tongue, Groove & V Jointed Reflective Barrier

**Source room:**

**Receiving room:**

**Volume:** 136m<sup>3</sup>

**Volume:** 220m<sup>3</sup>

**Condition:** clean

**Condition:** clean

**Type:** small reverberation room

**Type:** large reverberation room

**Location:** acoustic transmission suite


**Location:** acoustic transmission suite

**Temperature (°C):** 21.5

**Humidity (%):** 53.4

**DL<sub>R</sub>** = 28

**Category:** B3

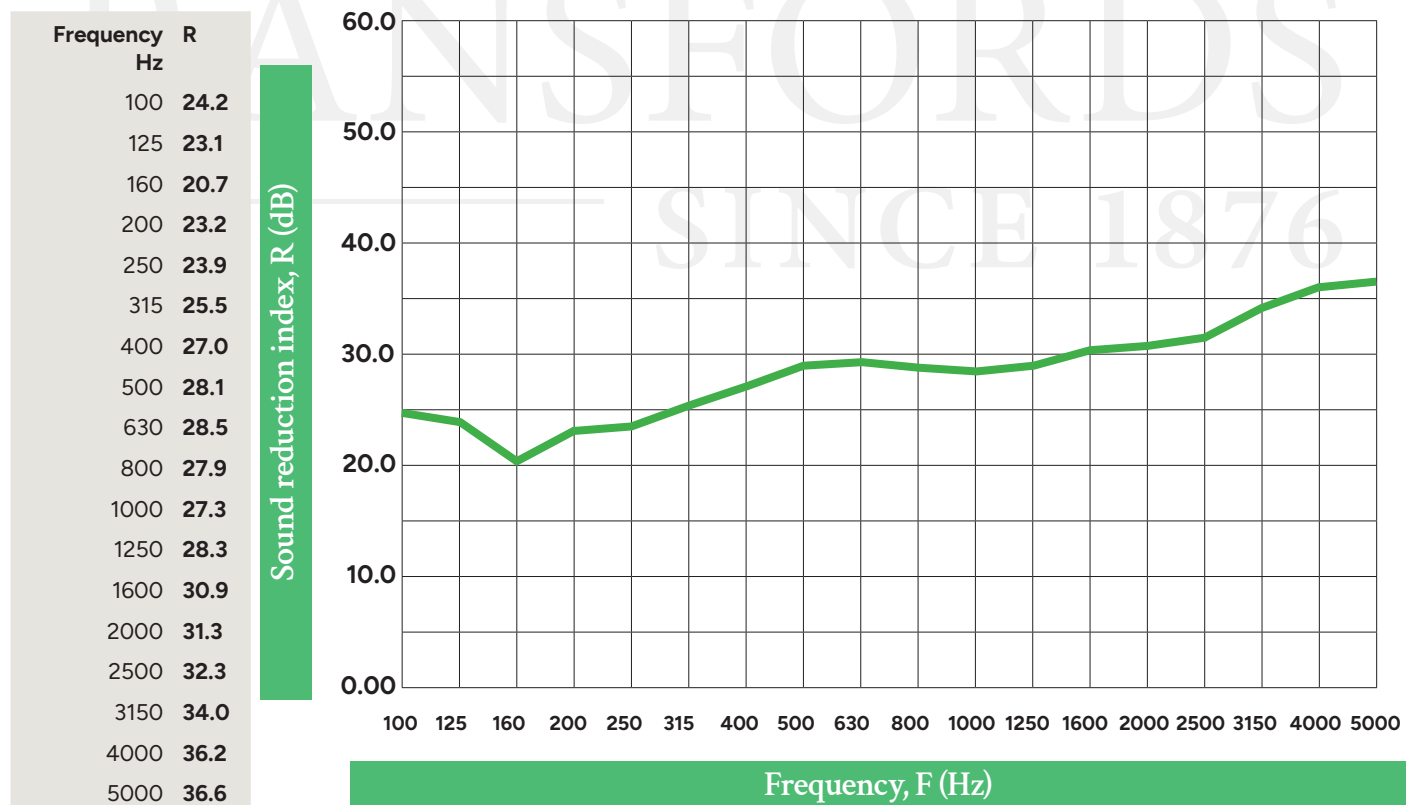

**Test reference number:** 501-373

University of Salford, School of Computing, Science & Engineering

**Date:** 09/11/11

SSV1

STGSP3/3